

To be No.1 in LED display industry



MS outdoor

Generous even from a square

MS outdoor



Shenzhen Dicolor Optoelectronics Co.,Ltd.

Address: No.13 Huiye Road, Tangjia Community, Fenghuang Street, Guangming District, Shenzhen, China
Tel: +86-755-32901555 Fax: -86-755-29604042
E-mail: inquiry@dicolor.cn Website: www.dicolor.cn



400-6645-658



Fast assembling



Long Lifespan



Front Maintenance



Good Heat Dissipation



Standard



Concise




Rectangular Splicing



Safety

Shenzhen Dicolor Optoelectronics Co.,Ltd.

Appearance

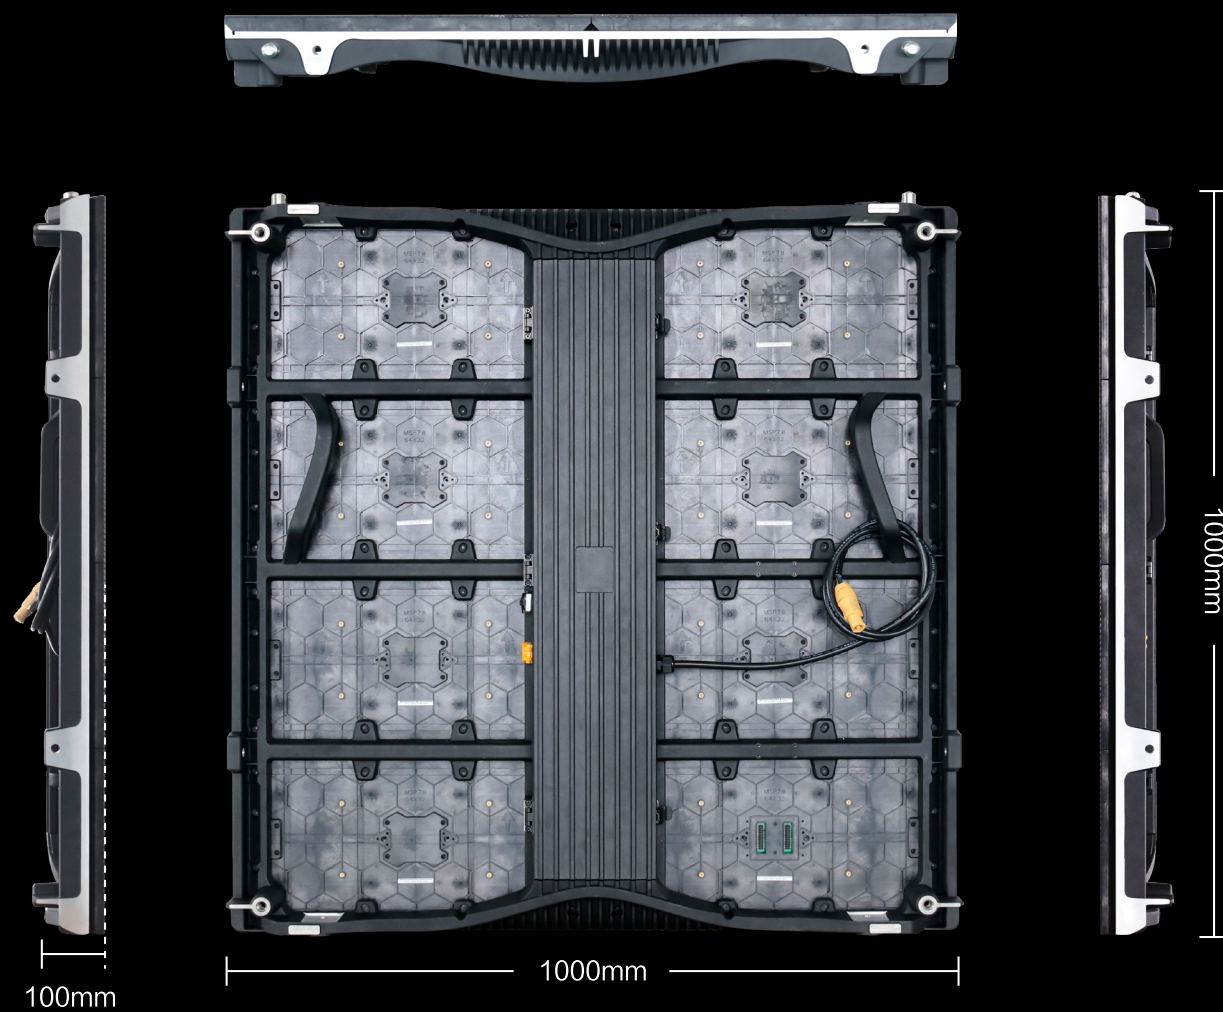

Product specifications

Product	MS-480	MS-780	MS-100
Pixel Pitch (mm)	4.81	7.81	10.41
Cabinet size (WxHxD/mm)	1000x1000x100	1000x1000x100	1000x1000x100
Cabinet Resolution	208x208	128x128	96x96
Cabinet Weight (Kg)	30	30	30
Brightness (Nits)	4500	6500	7000
Refresh Rate (Hz)	14	14	14
Gray Scale (Bit)	1920	1920	1920
IP Rating (Front/Rear)	IP65/IP54	IP65/IP54	IP65/IP54
Max./Avg Power Consumption(W/m ²)	720/240	680/226	570/190

Standard

Single cabinet size is a standard size of one square meter, reduce transportation and installation costs



100 mm

Thick

30 Kg

Weight


Convenient

Full front maintenance design,module 、 power 、 receiving card can be maintained from the front , pwer and signal cables were fixed on cabinet already , Convenient and fast




90 °Splicing

Optional beveled cabinet , support 90 ° right-angle stitching

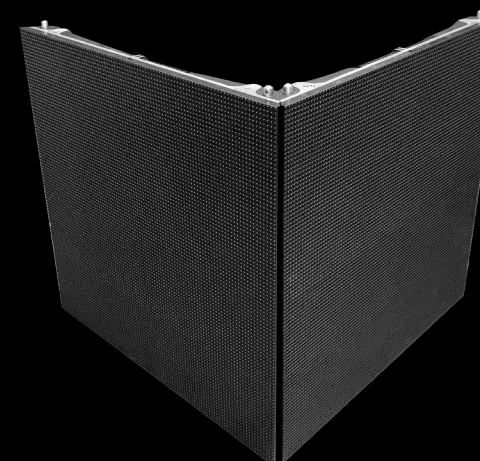

Precision

The cabinet is integrally molded using die-casting material,anti-deformation module kit,have higher precision



0.01 mm

Accuracy



Share

Same cabinet for different pixel pitch to achieve universal switch



Naked Installation

Die-cast aluminum cabinet , good heat dissipation,no air conditioner,no edging,saving steel structure

